

cabinet

SLC 1400 GLASS

+2... +10°C



Eco-friendly refrigerant



Anti-freezing system



Check hole



3 kota z hamulcem oraz
2 kota bez hamulca



Additional
2 levelling legs



LED
lighting



STANDARD EQUIPMENT:

- RAL 9016 coated external body
- Interior made of AISI 304 acid-resistant steel
- 70 mm insulation
- Eco-friendly refrigerant
- Glass door with replaceable seal
- Mechanical door lock
- Automatic door closing system
- Possibility to change doors L/R
- Electronic temperature controller with digital display allowing to change the temperature setting every 0.1K
- High and low temperature visual and sound alarm
- Open door alarm
- Dirty condenser coil alarm
- Broken temperature sensor alarm
- External alarm output - potential-free contact
- Auto-defrost and condensation evaporating
- Antifreezing system
- Shelf guides / horizontal supports
- 8 coated wire shelves
- Adjustable shelf position
- Check hole
- 3 castors with brake and 2 castors without brake
- 2 additional levelling legs
- Handles on the back of the device for easy transport
- LED lighting



OPTIONAL EQUIPMENT:

- Alarm backup battery
- Power failure alarm
- Temperature recorder
- Change of the standard temperature range
- Additional check hole in the wall
- Glycol container
- Adjustable PVC legs
- 75 mm drawer with dividers
- 150 mm drawer
- Additional shelf guides / horizontal supports
- Additional shelves (coated wire, inox wire)
- LED lighting
- External body made of AISI 304 acid-resistant steel
- External standalone temperature monitoring set with a SIM card



ADDITIONAL SERVICES:



Installation
qualification



Operational
qualification




Performance
Qualification

LAUREAT KONKURSU



TERAZ POLSKA

Bolarus
since 1962

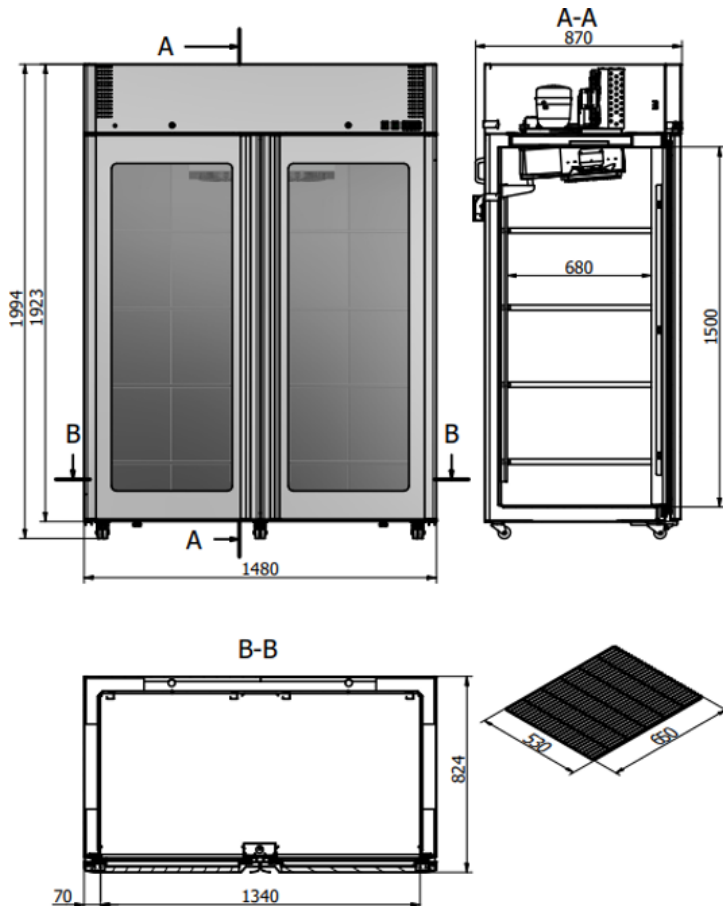

cabinet

SLC 1400 GLASS



Eco-friendly refrigerant



Anti-freezing system



Check hole



3 castors with brake and 2 castors without brake



Additional 2 levelling legs



LED lighting

Technical data

	Width	Depth	Height
External dimensions [mm]:	1480	870 (824)	1994
Internal dimensions [mm]:	1340	680	1500
Cooling unit type:	internal		
Cooling type:	dynamic		
Gross capacity:	1360 [dm ³]		
Net capacity:	1260 [dm ³]		
Weight:	205 [kg]		
Max load:	240 [kg]		
Number of shelves:	8		
Number of guides / horizontal supports:	16		
Max shelf load:	30 [kg]		
Temperature range:	+2... +10 [°C]		
Ambient conditions:	+25 [°C] at 60% HR		
Refrigerant:	R290		
Power:	230/50 [V/Hz]		
Number of external doors:	2		
Daily energy consumption:	8.0 [kWh/24h]		
Noise level:	57 [dB]		
Power rating:	730 [W]		
Rated current:	3.7 [A]		